

PRODUCT SPECIFICATION 产品规格书

ND2242C

Thermostatic Shower Column Set

恒温淋浴柱组合

(Rough-in Dimensions):

安装尺寸图:

(Unit): mm


单位: 毫米

Pressure range: 0.1-0.5MPa

水压范围: 0.1-0.5MPa

Best to use: 0.3MPa

最优水压: 0.3MPa

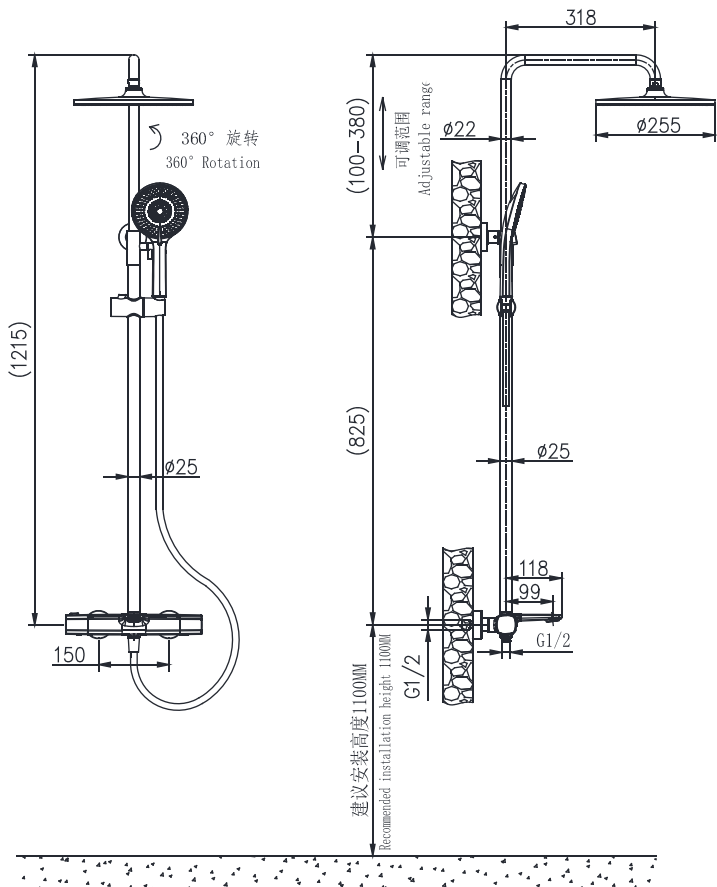

Item No. 品号	ND2242C		
Available Color 颜色	Chrome 铬色		
Materials 材质	Main part:Brass 主体: 黄铜	Water pipe:SUS 升降管: 不锈钢	
Cartridge 阀芯	Thermostatic Cartridge 恒温阀芯		
Aerator 起泡器	Ordinary 普通		
Shipping Package 运输包装	Set/CTN: 1 Set 套/箱: 1套	M ³ /CTN: 0.05 M ³ 体积/箱: 0.05 M ³	G.W/CTN: 4.0 kg 毛重/箱: 4.0kg
Remarks: Including thermostatic faucet body, Standard 10" ABS shower head, ABS hand-held shower and 1.5m PVC shower hose. 0.1MPa±0.02MPa : Outlet: 11.94L/min, Hand-held shower: 5.83L/min, Shower head: 5.19 L/min. 备注: 含恒温龙头主体, 标配手握花洒(ABS), 10寸顶花洒(ABS), L=1500mm 银色软管(PVC); 动态水压0.1MPa±0.02MPa: 出水嘴: 11.94L/min, 手持: 5.83L/min, 顶喷: 5.19L/min。			

INNOCI reserves the right to make changes or modifications on any of its products without advance notice.
INNOCI 艺耐公司保留不事先通知便改变或修改的权利

innoci

Innoci Sanitary ware Co.,Ltd
www.innoci.com

Version:A0
版本:A0