

PRODUCT SPECIFICATION 产品规格书

NF41000C

Embedded wall induction faucet

埋墙感应龙头

(Rough-in Dimensions):


安装尺寸图:

(Unit): mm

单位: 毫米

Standard pressure: 0.3Mpa

标准水压: 0.3Mpa

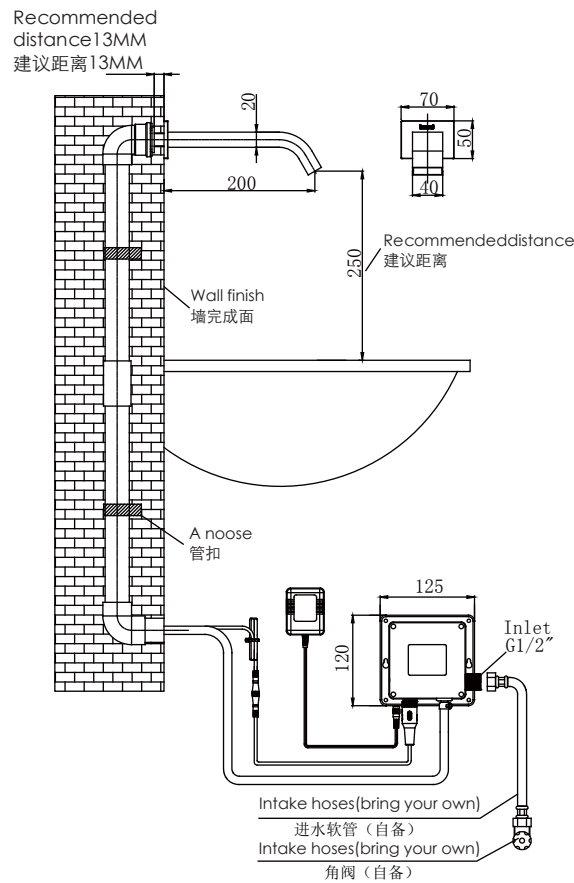

Item No. 品号	NF41000C
Available Color 颜色	Chrome 铬色
Materials 材质	Brass 铜
Aerator 起泡器	Neoperl 纽铂
Shipping Package 运输包装	Set/CTN: 6 Set M ³ /CTN: 0.09 M ³ G.W/CTN: 13.5 kg 套/箱: 6套 体积/箱: 0.09 M ³ 毛重/箱: 13.5 kg
Remarks: Applicable power supply: DC 6V (Section 4 5 LR6 alkaline battery AC :220 -240 V 50/60 HZ working pressure range: 0.05 MPA-0.7 MPA induction distance: 25±2CM (aligned with standard whiteboard) 备注: 适用电源: DC 6V (4节5号LR6碱性电池 AC: 220-240V 50/60HZ 工作水压范围: 0.05MPA-0.7MPA 感应距离: 25±2CM (对准标准白板)	

INNOCI reserves the right to make changes or modifications on any of its products without advance notice.
INNOCI 艺耐公司保留不事先通知便改变或修改的权利

innoci[®]

Innoci Sanitary ware Co., Ltd
www.innoci.com

Version:A0
版本:A0